

ROTALOCK VALVE


Model: 100-0035-00
1 1/4"-12UNF + 7/8"ODS
Discharge: 8-12 HP
Suction: 2-7 HP





Model: 100-0037-00
1 3/4"-12UN + 1 1/8"ODS
Descarga: 8-12 HP
Suction: N/A



Model: 100-0059-00
3/4"-16UNF + 1/2"ODS
Discharge: 2-7 HP
Suction: N/A

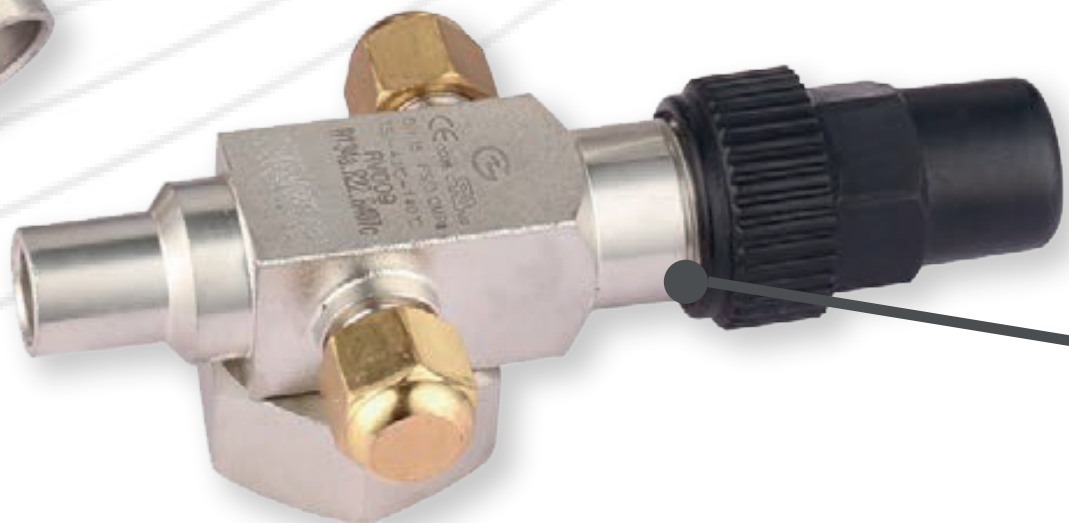

Technical Requirements	P	Q	Z
Material	STEEL	STEEL	PTFE
The Working Pressure	≤ 5 MPa		
The Suitable Medi	R22,R134a,R410A,R502,POE oil and some other refrigerants		
Temperature Range	-40℃~150℃		
Helium Leaking Detecting	leakage≤1.0g/a		
Qualification	CE0036 		

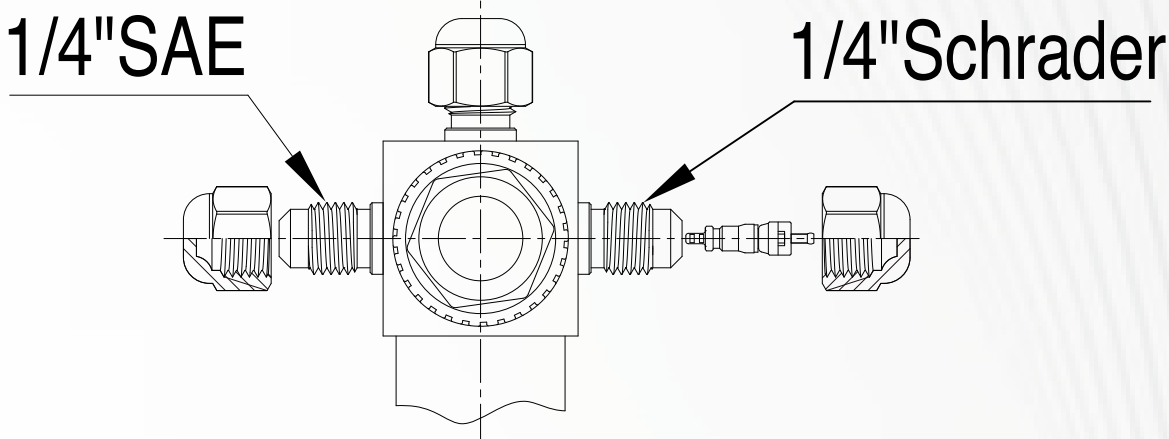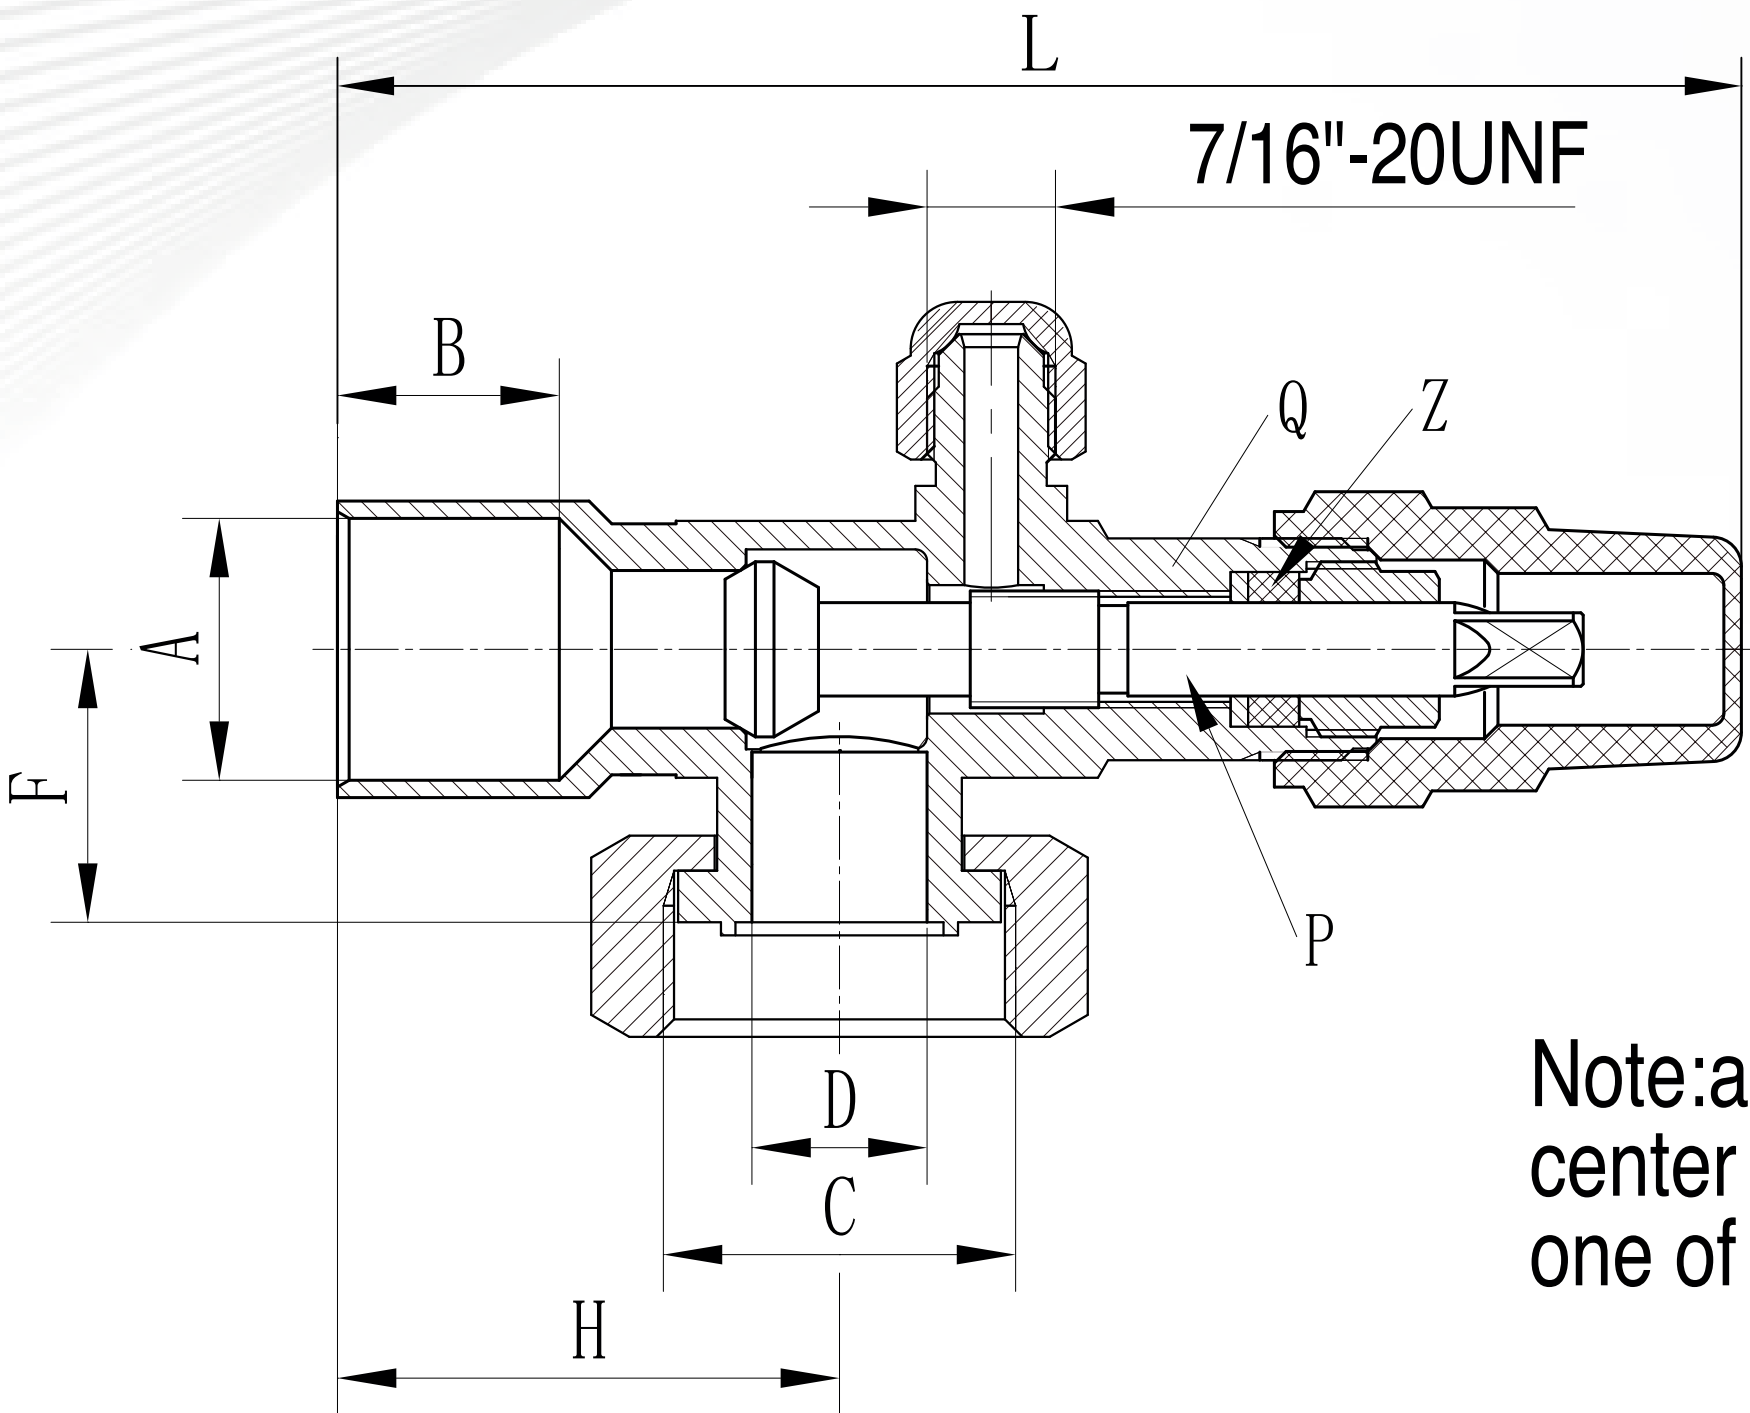

Note:add access port at left or right or center according to customer adopting one of connecting mode.

Modelo	“□”	A mm	B mm	D mm	F mm	H mm	L mm	C mm			
RV007	□20	6	8	Ø12	22	32.5	107	1"-14UNS(SW30)			
RV008		1/4"									
RV009		10									
RV010		3/8"	10			34.5	109				
RV011		12									
RV012		1/2"									
RV013		5/8"	13			37.5	112				
RV014		18									
RV015	3/4"										
RV016	□22	12	10	Ø13.5	22	34	111	1-1/4"-12UNF (SW36)			
RV017		1/2"									
RV018		5/8"							13	36	113
RV019		18									
RV020	3/4"	16	39			116					
RV021	18						Ø19		28	49.5	143
RV022	3/4"										
RV023	7/8"	19	52.5			146					
RV024	28			23	49.5			143			
RV025	1-1/8"									16	52.5
RV026	18	19	59			184					
RV027	3/4"			23	Ø27			31			
RV028	7/8"									24.5	65
RV029	28	28	72.5			199.5					
RV030	1-1/8"			28	74.5		201.5				
RV031	28							34	76.5	203.5	
RV032	1-1/8"	Ø38	43			74.5					201.5
RV033	1-3/8"			24.5	76.5		203.5				
RV034	42							28	76.5	203.5	
RV035	1-5/8"	34	76.5			203.5					
RV036	1-3/8"			Ø38	43		76.5				203.5
RV037	42							28	76.5	203.5	
RV038	1-5/8"	34	76.5			203.5					
RV039	2-1/8"			Ø38	43		76.5				203.5